Specifying Antler Lighting for Commercial and Hospitality Projects

A practical guide for designers, architects, builders, and hospitality buyers.

Antler lighting brings natural texture and a distinctive focal point to an interior. A successful specification also accounts for certification, location rating, dimensions, weight, ceiling support, electrical ratings, and delivery timing.

Our chandeliers, pendants, and wall sconces are UL Listed under **File E238337 for the United States and Canada**. Custom designs must meet the approved construction requirements of our listing; we confirm the proposed configuration during quotation.

Plan these details early

- **Location:** dry indoor use.
- **Scale:** fixture dimensions, hanging height, and clearances.
- **Support:** net fixture weight, canopy size, and attachment requirements.
- **Electrical:** E12 sockets; 25-40 W per chandelier socket, with a 40 W maximum actual draw.
- **Timing:** most made-to-order chandeliers take 6-10 weeks to build, plus freight.
- **Delivery:** receiving access, crate size, and handling arrangements.



An antler chandelier beneath a vaulted timber ceiling. Confirm the full fixture dimensions and final hanging height for your space.

Start with your project. Send the fixture or concept, dimensions, quantity, project location, and required on-site date. Email Dante or call **(702) 861-8116**.

01 / CERTIFICATION & LOCATION

Confirm the listing and the intended installation

UL listing applies to the finished product within its approved scope. Listed electrical components alone do not establish that an assembled chandelier is a listed fixture. Confirm the documentation and marking for the fixture and configuration you specify.

Product category	UL listing status
Chandeliers, pendants, and wall sconces	UL Listed under File E238337 for the United States and Canada, within the approved construction scope.
Custom commissions	Available within the listing's approved construction requirements. Configuration and certification details are confirmed during quotation.
Table and floor lamps	Not covered by our UL listing. Do not specify them as UL Listed under this file.
Other wired products	Confirm product-specific status. Our listing statement also identifies excluded wired candelabras.

For custom work, provide the dimensions, configuration, and intended location early. The same construction requirements apply when a project uses customer-supplied antlers. A requested design change does not automatically fall within the listing.

Download our UL listing statement from the spec sheet library. For background, see the UL-listed antler lighting guide.

What does a commercial installation require?

For U.S. projects, confirm the locally adopted electrical code and project approval requirements. The NEC generally requires luminaires to be listed; workplace electrical equipment must also meet applicable approval requirements. Listing does not approve every location, support method, installation, or later modification.

An unlisted or modified fixture may require a field evaluation or another process accepted by the local authority. Resolve that question before ordering. Canadian projects should confirm applicable provincial or territorial requirements with their project team.

Dry indoor locations only

Our fixtures are intended for dry indoor settings such as lobbies, great rooms, restaurants, private dining rooms, bars, corridors, and guest suites. They are not intended for covered exterior areas, porte-cocheres, open-air terraces, pool or spa enclosures, or areas subject to dampness or condensation.

Ceiling height affects proportion and required clearances. Confirm the final hanging height with the design team and installer, allowing for circulation, doors, furniture, and applicable local requirements. Use our size guide for early planning.

02 / MOUNTING & DOCUMENTATION

Give the project team the information it needs

Request net fixture weight, overall dimensions, canopy dimensions, and intended hanging height before ceiling support is finalized. Distinguish preliminary custom estimates from confirmed final measurements.

> **The 50-pound rule for U.S. installations:** fixtures weighing more than 50 pounds require support independent of the outlet box unless the box is specifically listed and marked to support the fixture's weight. Follow the fixture's installation instructions and have the project electrician confirm the mounting method.

An existing box is not automatically suitable below 50 pounds. The installer must verify the load, structural attachment, hardware, and complete support arrangement. Follow any fixture-specific requirement for structural anchoring.

Send us the fixture name or proposed dimensions early. Share our installation and hanging guide with the qualified professionals responsible for the installation.

What belongs in a submittal package?

Information	What to include
Fixture identity	Model or project-specific description; quantity; antler species, finish, and light count.
Dimensions & support	Overall size, proposed hanging height, net weight, canopy dimensions, and applicable mounting instructions.
Electrical ratings	Supply voltage, E12 socket type, 25-40 W per chandelier socket, and maximum fixture load. Maximum actual draw: 40 W per socket.
Certification & location	Listing information, intended location rating, and any project-specific design documentation.
Project approvals	Approved drawings and other agreed documentation for custom work.

Selway maximum fixture load: 480 W with 12 lights, 640 W with 16 lights, or **800 W with 20 lights**, at 40 W per socket. Compatible LED bulbs may draw less; dimming requires compatible dimmable bulbs and controls.

Download available specification sheets or request missing and custom details. We confirm the information available and the timing for additional documentation. Use the selected fixture's current label and confirmed specifications.

03 / PRODUCTION & TRADE

Plan backward from your required on-site date

> Most made-to-order chandeliers have an estimated build time of **6-10 weeks**, plus freight transit. Custom designs, matched sets, and larger orders may require more time. Use the schedule confirmed in your quote, and ask about current quick-ship options.

For custom and multi-unit projects, production begins after drawings are approved and the required payment has cleared. These orders require a 50% deposit. Include design development and approval time before the production period.

Coordinate the sequence early

Stage	Project action
Select & define	Choose the fixture or design direction. Provide the full quantity, intended location, and required on-site date.
Coordinate support	Give the design and installation teams the weight and attachment information before the ceiling is closed.
Approve & commission	Confirm drawings, specifications, payment terms, and the production schedule.
Receive & install	Allow time for freight, inspection, site handling, and installation after delivery.

Changes after drawing approval are quoted as change orders and require written approval. Under our trade terms, lead time restarts when the change is approved. Confirm the cost and schedule effect before proceeding.

Working with designers and trade accounts

Our trade program serves designers, architects, builders, hospitality buyers, and other qualifying professionals. A trade account provides access to trade pricing and terms; a trade account is not required to request information about a single fixture or to order directly.

For multi-unit and whole-property projects, request a coordinated quote so quantity, material selection, freight, approvals, and production can be considered together. Share the complete quantity at the outset, especially when fixtures need to coordinate across a property.

Tax-exempt purchasing requires applicable exemption documentation. Review the trade account terms and your quote for payment, change, cancellation, delivery, and return conditions.

04 / FREIGHT & RECEIVING

Plan the route into the room

A chandelier can fit its intended room and still be difficult to move through a doorway, elevator, stairwell, or tight turn. Confirm both the fixture's dimensions and the crated dimensions before delivery.



An antler chandelier supported inside a custom wooden crate during packing. Crate dimensions and shipping weight differ from the fixture's installed size and weight.

Confirm before shipment

- Delivery address, access restrictions, receiving hours, and appointment requirements.
- Crate dimensions, shipment weight, and the route to the installation point.
- Loading dock, liftgate, forklift, or other handling needs.
- The team responsible for receiving, unpacking, and moving the fixture.
- Suitable storage if installation will not follow delivery immediately.

What does the freight price include?

> **Landmark Collection:** crated freight to the continental United States is included on Selway and Snowcrest. Shipping for other fixtures and destinations is confirmed before ordering. International freight and project-specific delivery requirements should be addressed in the quote.

Inspect and document the delivery

Review the shipment's delivery and inspection instructions before arrival. Inspect and photograph the shipment as directed, retain packaging when required, and report damage promptly under the applicable shipping terms.

Confirm receiving labor and equipment ahead of time. Do not assume the freight driver will unpack, move, or help lift the chandelier. Installation and handling should follow the fixture's instructions and the project team's plan.


05 / CUSTOM DESIGN

A fixture shaped around your project

We work from dimensions, sketches, drawings, and reference images to develop a fixture suited to the room. Share the intended span, height, species, finish, light count, and visual direction.

Our master builder, Dante Martin, brings more than twenty years of antler-lighting experience to the work. Each piece accounts for the natural shapes of the material, its construction, and the project's installation requirements.

Our largest catalog fixtures reach 72 inches across. Different dimensions, proportions, or species combinations can be discussed as custom commissions. Feasibility, certification scope, price, and timing are confirmed during quotation.

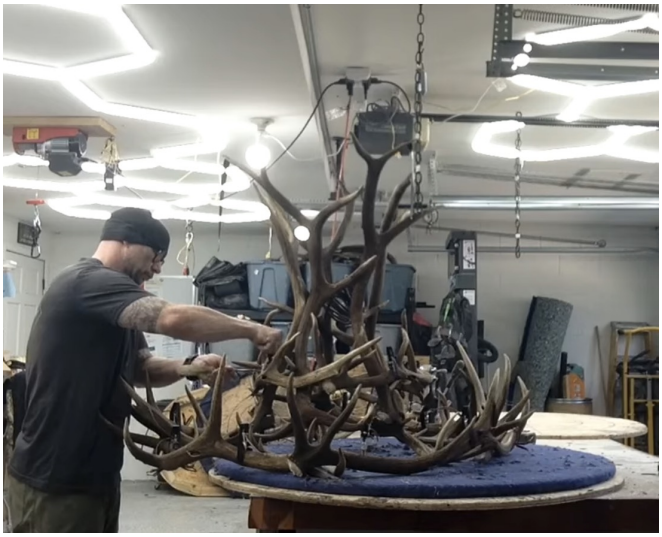

Dante Martin, master builder at Antler Chandeliers & Lighting Co.

Using your own antlers

We also consider builds using customer-supplied antlers. Material suitability and the proposed design are reviewed before the order is confirmed. The finished fixture must meet the approved construction requirements for its listing. Learn more about building with your own antlers.

Reviewing the composition before final wiring

Natural variation makes every antler fixture unique. Reference photographs establish the design direction, while individual antlers vary in shape, color, and proportions.

For custom and commissioned work, photographs of the composition are provided before final wiring and crating so you can review the overall arrangement. For catalog fixtures, ask about photographs when ordering.

> Progress photographs help you confirm the composition against the agreed design. We confirm the **cost and scheduling effect of requested changes** before proceeding. Changes after drawing approval follow the quoted change-order and written-approval process.

Review the agreed design and the quote's payment, change, cancellation, and return provisions before placing an order. Coordinated sets can share a design and finish while retaining the natural variation of individual antlers.

06 / QUICK ANSWERS

Frequently asked questions

Are your antler chandeliers UL Listed?

Our chandeliers, pendants, and wall sconces are UL Listed under File E238337 for the United States and Canada. Project suitability also depends on the selected fixture, installation environment, support, and applicable requirements.

Can custom antler chandeliers carry the same certification?

Yes. Custom fixtures can carry the UL Mark when their construction meets the requirements covered by our listing. We review the proposed design and confirm the certification details during quotation.

Can these fixtures be installed outdoors under a roof?

No. They are intended for dry indoor locations. Covered exterior areas, open-air terraces, pool and spa enclosures, and other damp or condensation-prone environments are excluded.

What lead time should I allow?

Most made-to-order chandeliers have an estimated build time of 6-10 weeks, plus freight. Custom and multi-unit schedules are confirmed in the quote and begin after required approvals and cleared payment. Ask about current quick-ship options.

What documentation can I obtain?

Download available specification sheets and our listing statement from the public spec sheet library. Request missing or custom details. Chandelier sockets have a 40 W maximum actual draw per socket; compatible LED bulbs may draw less. The 20-light Selway has an 800 W maximum fixture load.

Does fixture weight affect ceiling support?

Yes. For U.S. installations, fixtures over 50 pounds need support independent of the outlet box unless the box is specifically listed and marked for that weight. Lighter fixtures also need suitable support. Follow the fixture instructions and have the installer verify the complete support arrangement.

Can you provide coordinated fixtures across a property?

Yes. Share the full quantity and design requirements early so material selection and production can be planned together. Natural-antler fixtures can coordinate in design and finish while retaining individual variation.

> **Have a project-specific question?** Contact dante@antlerchandeliers.com or call **(702) 861-8116**. Send the drawing, fixture name, or room information you already have.

07 / START YOUR PROJECT

Request a commercial project quote

Share the information below to begin. If the design is still developing, send what is known so we can identify the remaining details needed for a quote.

Project information	What to send
Design	Fixture selection, drawing, sketch, or reference images.
Configuration	Desired dimensions, species, finish, light count, and quantity.
Installation	Ceiling height, intended hanging height, location conditions, and submittal requirements.
Delivery & schedule	Project location, access or receiving restrictions, and required on-site date.

Speak with Dante
dante@antlerchandeliers.com | **(702) 861-8116**
Apply for a trade account | Browse antler chandeliers

Project resources

Specification sheets | UL listing statement | Installation guide

Size guide | UL listing guide | Use your antlers

Trade terms | All guides

Certification and installation references

For independent certification records and further technical guidance:

UL Product iQ: E238337, U.S. listing | Canadian listing

UL Solutions: Follow-Up Services and construction requirements

UL Solutions: Field Evaluation Services

NFPA 70: National Electrical Code | OSHA: electrical approval definitions

This guide provides general project-planning information. Applicable code editions and approval requirements vary by jurisdiction. Confirm the fixture, installation conditions, structural support, and local requirements with the project's qualified professionals and authority having jurisdiction. Use the fixture's current label, instructions, and confirmed specifications.

Revised October 2026